# Transport Layer (Kurose-Ross Chap 3, Tanenbaum Chap 6)

## Goals:

- understand principles behind transport layer services:
  - multiplexing/demultiplexing
  - reliable data transfer
  - flow control
  - congestion control
- instantiation and implementation in the Internet

## Overview:

- transport layer services
- multiplexing/demultiplexing
- connectionless transport: UDP
- principles of reliable data transfer
- connection-oriented transport: TCP
  - reliable transfer
  - flow control
  - connection management
- principles of congestion control
- TCP congestion control



## Transport services and protocols

- provide *logical communication* between app' processes running on different hosts
- transport protocols run in end systems (primarily)

transport vs network layer services:

- *network layer:* data transfer between end systems
- *transport layer:* data transfer between processes
  - relies on, enhances, network layer services

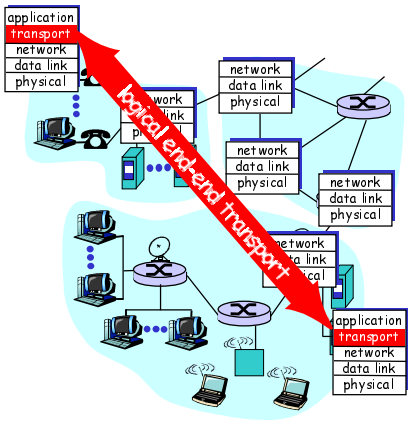

## Transport-layer protocols

Internet transport services:

- reliable, in-order unicast delivery (TCP)
  - congestion
  - flow control
  - connection setup
- unreliable ("best-effort"), unordered unicast or multicast delivery: UDP
- services not available:
  - real-time
  - bandwidth guarantees
  - reliable multicast

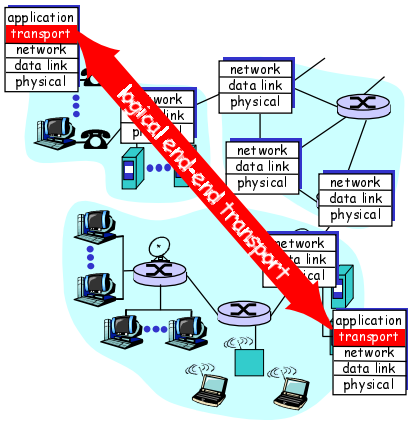




## Multiplexing/demultiplexing

Recall: *segment* - unit of data exchanged between transport layer entities
- aka TPDU: transport protocol data unit

Demultiplexing: delivering received segments (TPDUs)to correct app layer processes

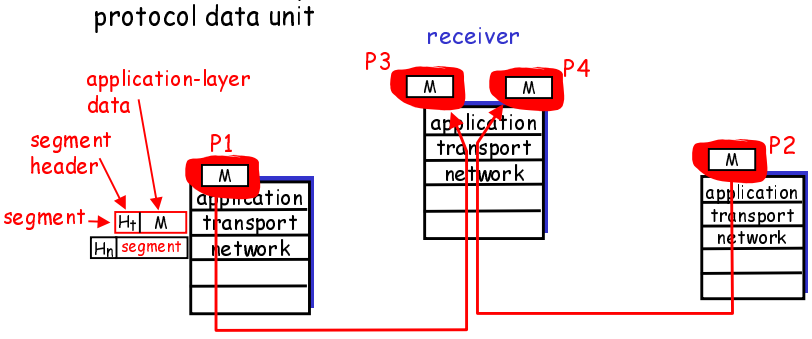

# Multiplexing/demultiplexing

Multiplexing:
gathering data from multiple app processes, enveloping data with header (later used for demultiplexing)

multiplexing/demultiplexing:

- based on sender, receiver port numbers, IP addresses
  - source, dest port #s in each segment
  - recall: well-known port numbers for specific applications

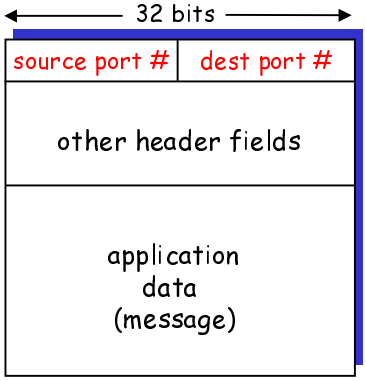


TCP/UDP segment format



# Multiplexing/demultiplexing: examples

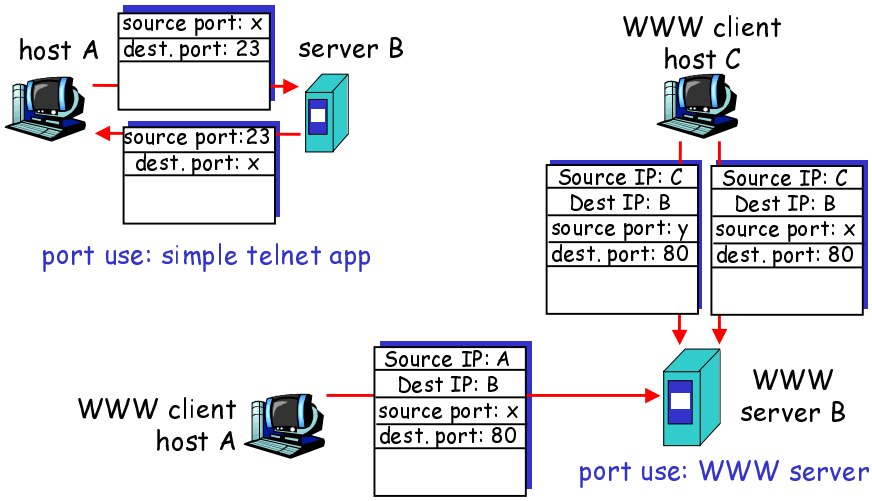

# UDP: User Datagram Protocol [RFC 768]

- "no frills," "bare bones" Internet transport protocol
- "best effort" service, UDP segments may be:
  - lost
  - delivered out of order to app
- *connectionless:*
  - no handshaking between UDP sender, receiver
  - each UDP segment handled independently of others

**Why is there a UDP?**

- no connection establishment (which can add delay)
- simple: no connection state at sender, receiver
- small segment header
- no congestion control: UDP can blast away as fast as desired



# UDP: more

- often used for streaming multimedia apps
  - loss tolerant
  - rate sensitive
- other UDP uses (why?):
  - DNS
  - SNMP
- reliable transfer over UDP: add reliability at application layer
  - application-specific error recover!

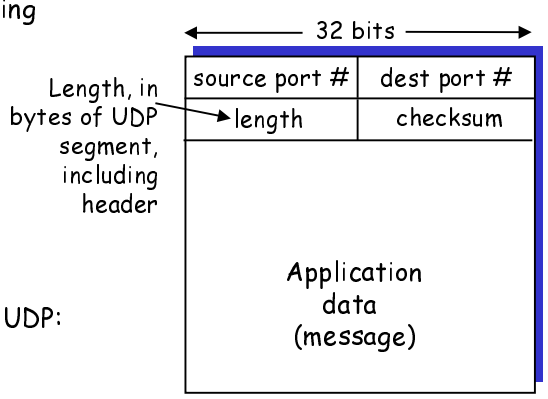


UDP segment format

# UDP checksum

Goal: detect "errors" (e.g., flipped bits) in transmitted segment

**Sender:**

- treat segment contents as sequence of 16-bit integers
- checksum: addition (1's complement sum) of segment contents
- sender puts checksum value into UDP checksum field

**Receiver:**

- compute checksum of received segment
- check if computed checksum equals checksum field value:
  - NO - error detected
  - YES - no error detected. *But maybe errors nonethless?* More later ….



# Principles of Reliable data transfer

- important in app., transport, link layers
- top-10 list of important networking topics!

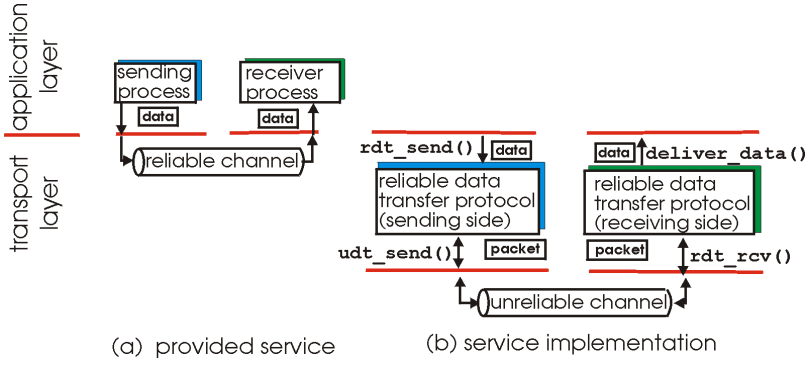


- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

## Reliable data transfer: getting started

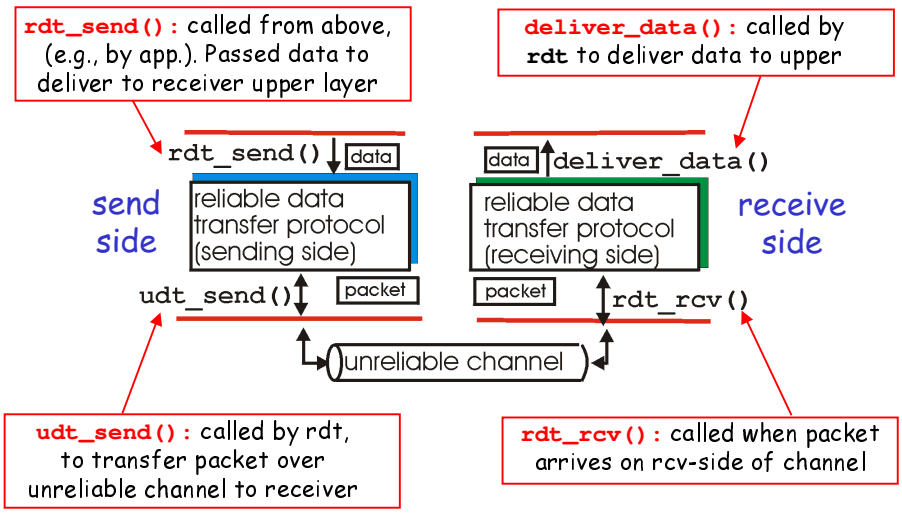




## Reliable data transfer: getting started

We'll:

- incrementally develop sender, receiver sides of reliable data transfer protocol (rdt)
- consider only unidirectional data transfer
  - but control info will flow on both directions!
- use finite state machines (FSM) to specify sender, receiver

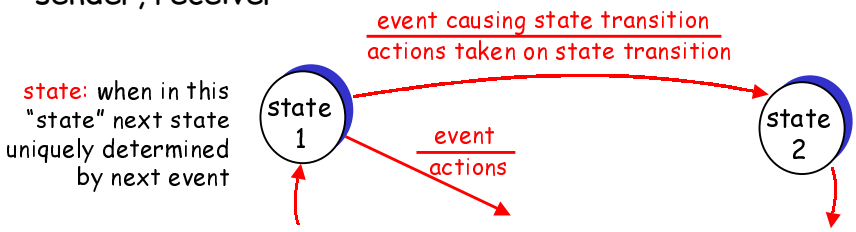

## Rdt1.0: reliable transfer over a reliable channel

- underlying channel perfectly reliable
  - no bit errors
  - no loss of packets
- separate FSMs for sender, receiver:
  - sender sends data into underlying channel
  - receiver read data from underlying channel

(a) rdt1.0: sending side (b) rdt1.0: receiving side



## Rdt2.0: channel with bit errors

- underlying channel may flip bits in packet
  - recall: UDP checksum to detect bit errors
- *the* question: how to recover from errors:
  - *acknowledgements (ACKs):* receiver explicitly tells sender that pkt received OK
  - *negative acknowledgements (NAKs):* receiver explicitly tells sender that pkt had errors
  - sender retransmits pkt on receipt of NAK
  - human scenarios using ACKs, NAKs?
- new mechanisms in **`rdt2.0`** (beyond **`rdt1.0`**):
  - error detection
  - receiver feedback: control msgs (ACK,NAK) rcvr->sender

# rdt2.0: FSM specification

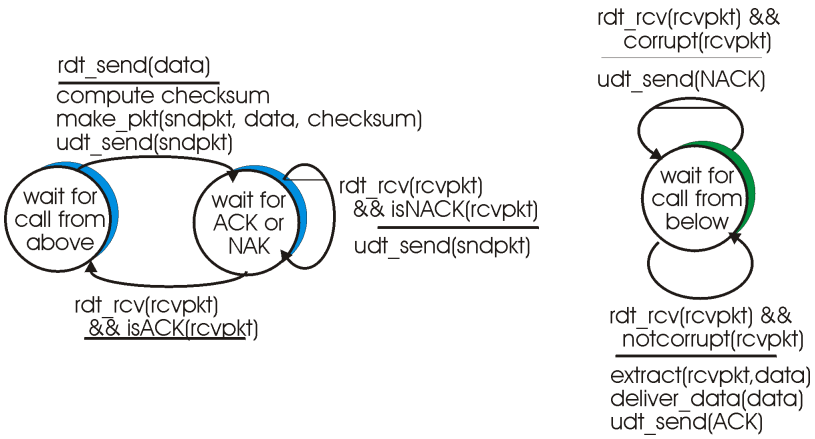




# rdt2.0: in action (no errors)

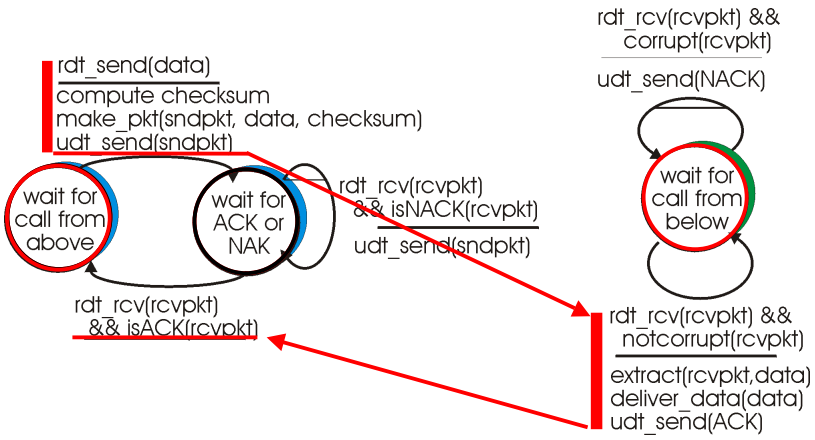

# rdt2.0: in action (error scenario)

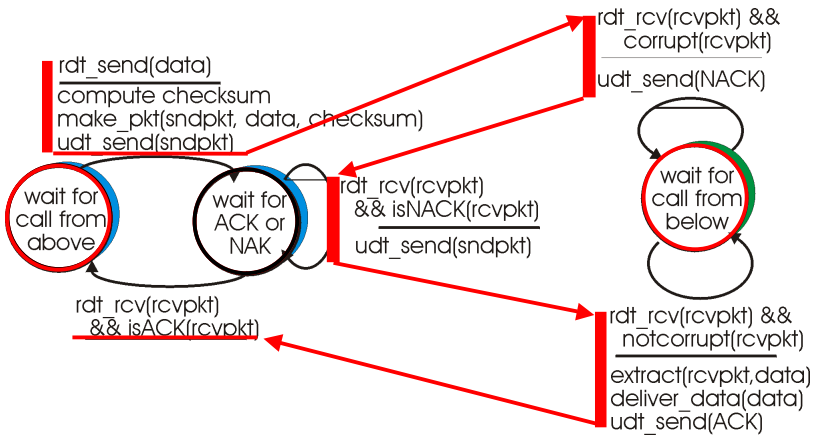




# rdt2.0 has a fatal flaw!

## What happens if ACK/NAK corrupted?

- sender doesn't know what happened at receiver!
- can't just retransmit: possible duplicate

## What to do?

- sender ACKs/NAKs receiver's ACK/NAK? What if sender ACK/NAK lost?
- retransmit, but this might cause retransmission of correctly received pkt!

## Handling duplicates:

- sender adds *sequence number* to each pkt
- sender retransmits current pkt if ACK/NAK garbled
- receiver discards (doesn't deliver up) duplicate pkt

**stop and wait**

Sender sends one packet, then waits for receiver response

# rdt2.1: sender, handles garbled ACK/NAKs

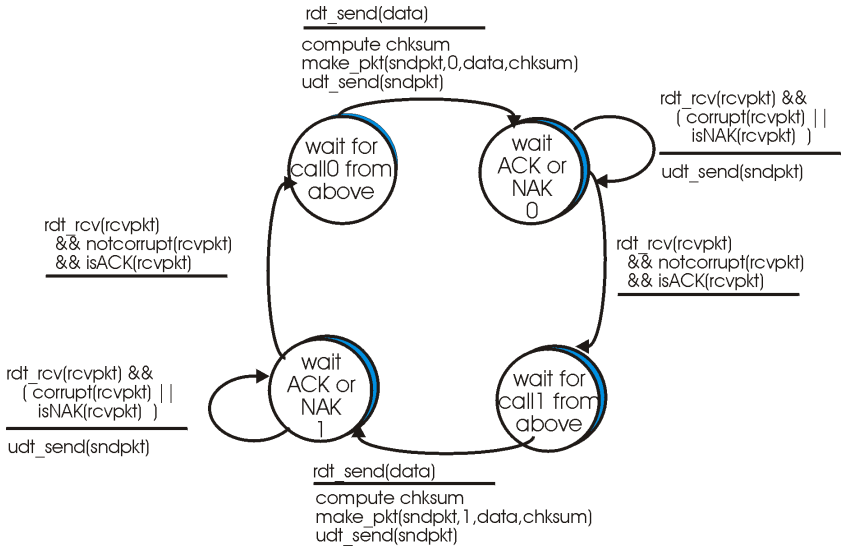




# rdt2.1: receiver, handles garbled ACK/NAKs

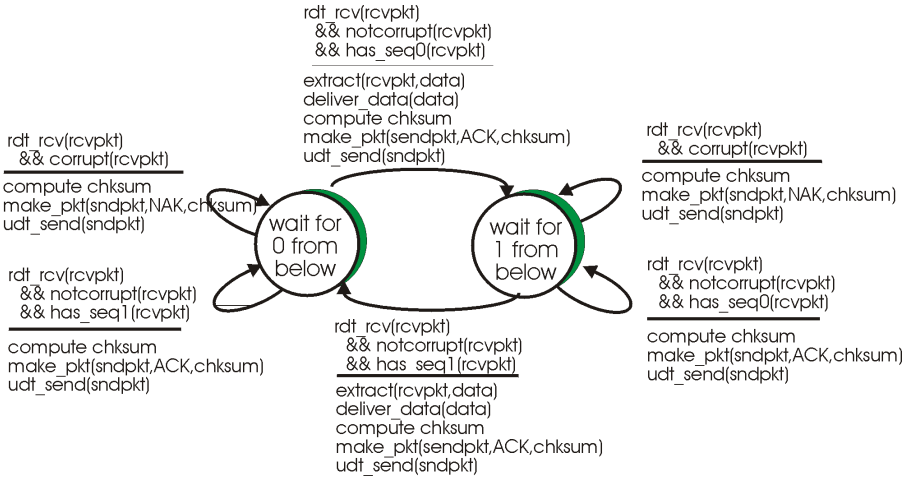

# rdt2.1: discussion

**Sender:**

- seq # added to pkt
- two seq. #'s (0,1) will suffice. Why?
- must check if received ACK/NAK corrupted
- twice as many states
  - state must "remember" whether "current" pkt has 0 or 1 seq. #

**Receiver:**

- must check if received packet is duplicate
  - state indicates whether 0 or 1 is expected pkt seq #
- note: receiver can *not* know if its last ACK/NAK received OK at sender



# rdt2.2: a NAK-free protocol

- same functionality as rdt2.1, using ACKs only
- instead of NAK, receiver sends ACK for last pkt received OK
  - receiver must *explicitly* include seq # of pkt being ACKed
- duplicate ACK at sender results in same action as NAK: *retransmit current pkt*

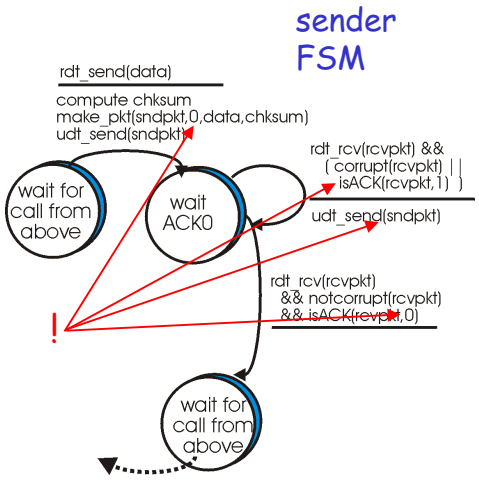

## rdt3.0: channels with errors *and* loss

New assumption: underlying channel can also lose packets (data or ACKs)

- checksum, seq. #, ACKs, retransmissions will be of help, but not enough

Q: how to deal with loss?

- sender waits until certain data or ACK lost, then retransmits
- yuck: drawbacks?

Approach: sender waits "reasonable" amount of time for ACK

- retransmits if no ACK received in this time
- if pkt (or ACK) just delayed (not lost):
  - retransmission will be duplicate, but use of seq. #'s already handles this
  - receiver must specify seq # of pkt being ACKed
- requires countdown timer



## rdt3.0 sender

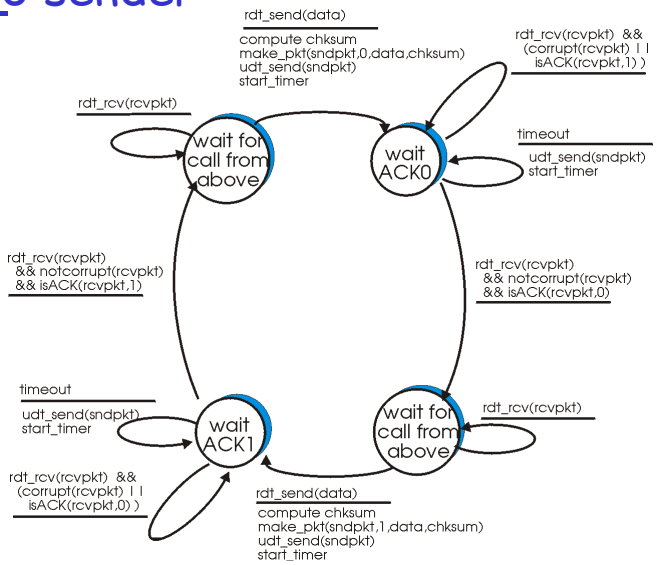

# rdt3.0 in action

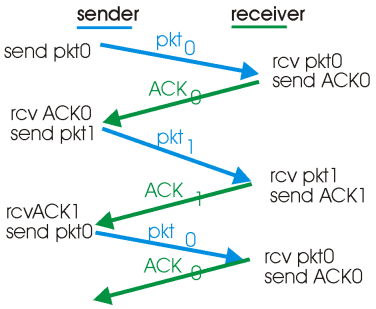


(a) operation with no loss

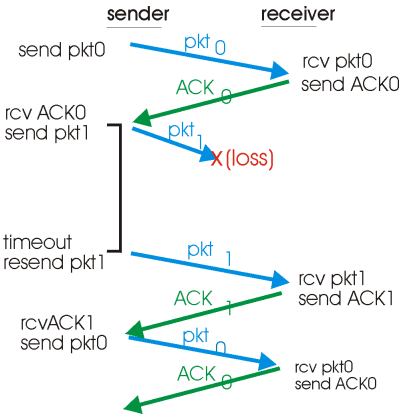


(b) lost packet



# rdt3.0 in action

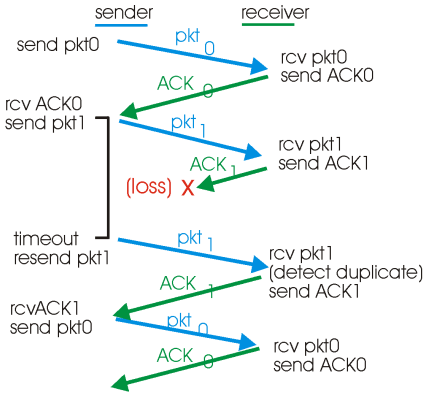


(c) lost ACK

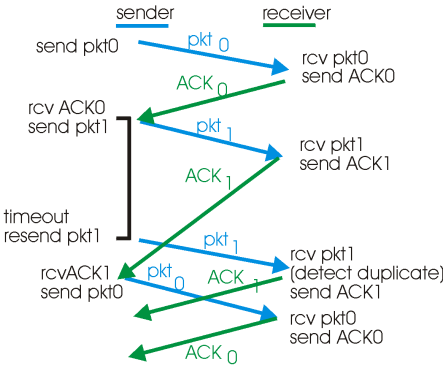


(d) premature timeout

# Performance of rdt3.0

- rdt3.0 works, but performance stinks
- example: 1 Gbps link, 15 ms e-e prop. delay, 1KB packet:

$$T_{transmit} = \frac{8kb/pkt}{10**9\ b/sec} = 8\ microsec$$

$$\text{Utilization} = U = \frac{\text{fraction of time sender busy sending}}{} = \frac{8\ microsec}{30.016\ msec} = 0.00015$$

  - 1KB pkt every 30 msec -> 33kB/sec thruput over 1 Gbps link
  - network protocol limits use of physical resources!



# Pipelined protocols

Pipelining: sender allows multiple, "in-flight", yet-to-be-acknowledged pkts

  - range of sequence numbers must be increased
  - buffering at sender and/or receiver

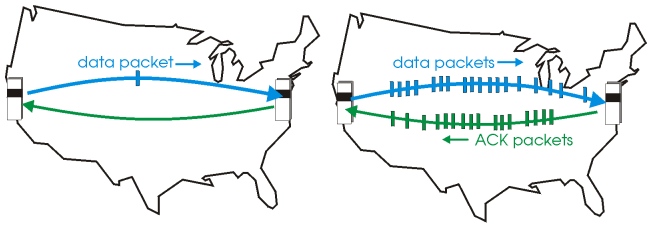


(a) a stop-and-wait protocol in operation (b) a pipelined protocol in operation

- Two generic forms of pipelined protocols: *go-Back-N, selective repeat*

# Go-Back-N

Sender:

- k-bit seq # in pkt header
- "window" of up to N, consecutive unack'ed pkts allowed

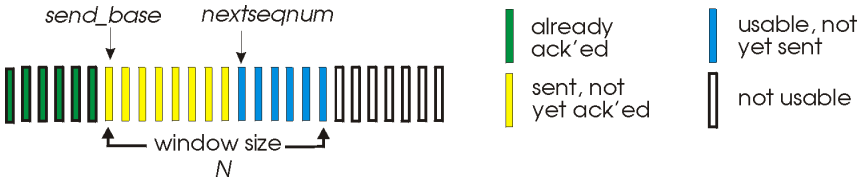


- ACK(n): ACKs all pkts up to, including seq # n - "cumulative ACK"
  - may deceive duplicate ACKs (see receiver)
- timer for each in-flight pkt
- *timeout(n):* retransmit pkt n and all higher seq # pkts in window



# GBN: sender extended FSM

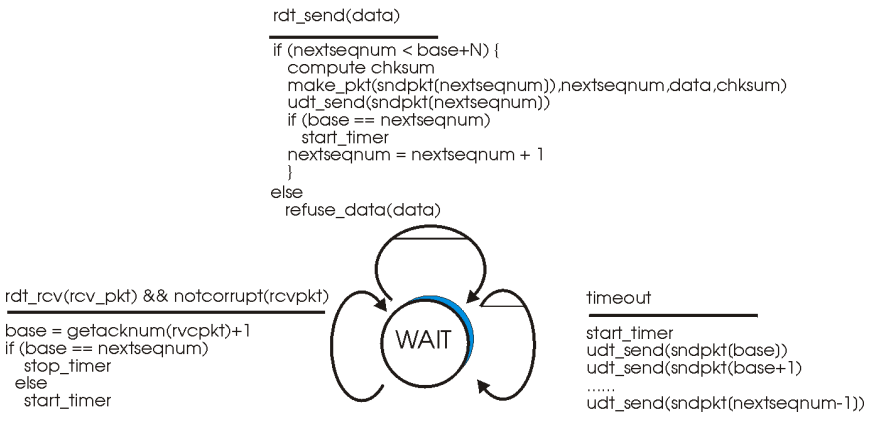

# GBN: receiver extended FSM

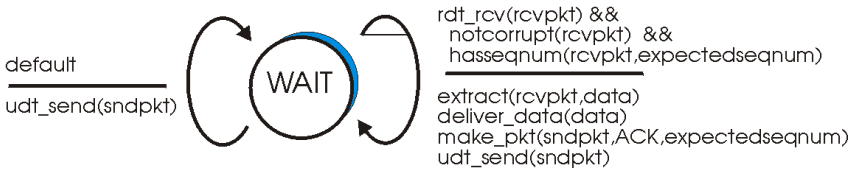


receiver simple:

- ACK-only: always send ACK for correctly-received pkt with highest *in-order* seq #
  - may generate duplicate ACKs
  - need only remember **expectedseqnum**
- out-of-order pkt:
  - discard (don't buffer) -> no receiver buffering!
  - ACK pkt with highest in-order seq #



# GBN in action

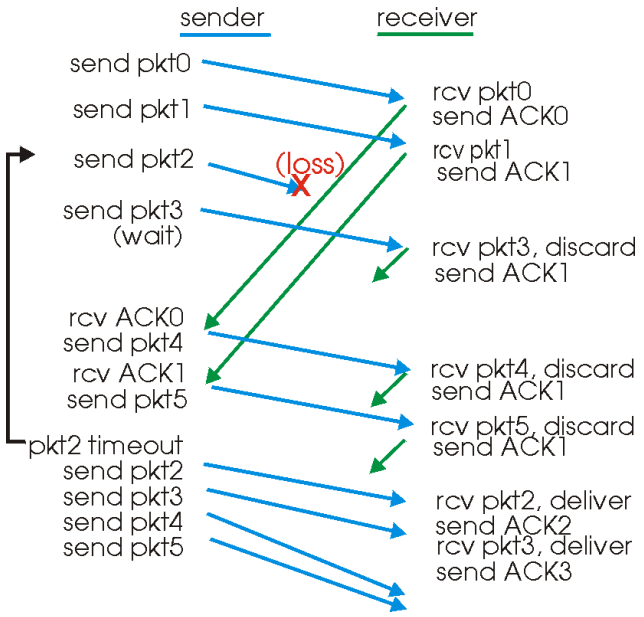

# Selective Repeat

- receiver *individually* acknowledges all correctly received pkts
  - buffers pkts, as needed, for eventual in-order delivery to upper layer
- sender only resends pkts for which ACK not received
  - sender timer for each unACKed pkt
- sender window
  - N consecutive seq #'s
  - again limits seq #s of sent, unACKed pkts



# Selective repeat: sender, receiver windows

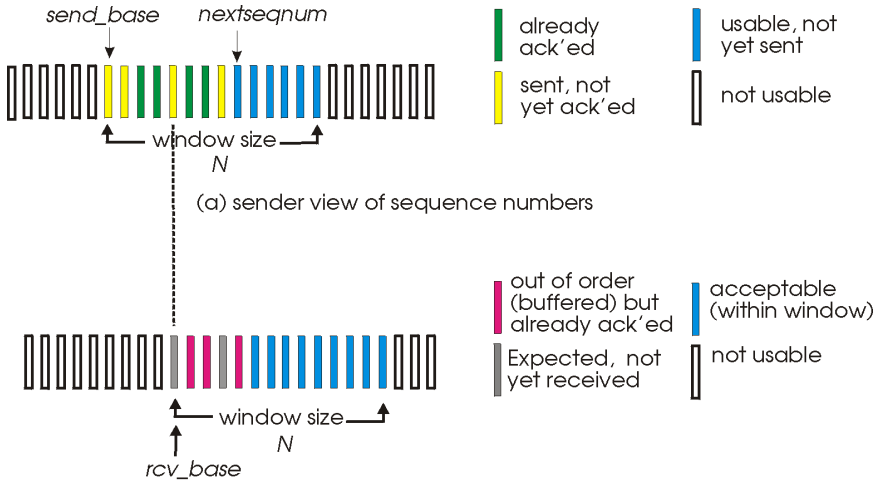

# Selective repeat

**sender**

data from above :

- if next available seq # in window, send pkt

timeout(n):

- resend pkt n, restart timer

ACK(n) in [sendbase,sendbase+N]:

- mark pkt n as received
- if n smallest unACKed pkt, advance window base to next unACKed seq #

**receiver**

pkt n in [rcvbase, rcvbase+N-1]

- send ACK(n)
- out-of-order: buffer
- in-order: deliver (also deliver buffered, in-order pkts), advance window to next not-yet-received pkt

pkt n in [rcvbase-N,rcvbase-1]

- ACK(n)

otherwise:

- ignore



# Selective repeat in action

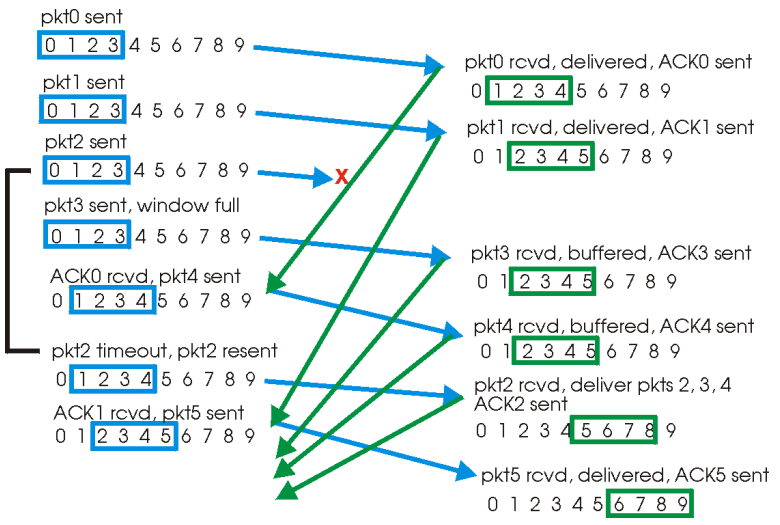

# Selective repeat: dilemma

Example:

- seq #'s: 0, 1, 2, 3
- window size=3

- receiver sees no difference in two scenarios!
- incorrectly passes duplicate data as new in (a)
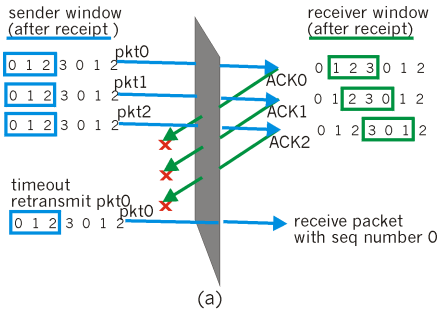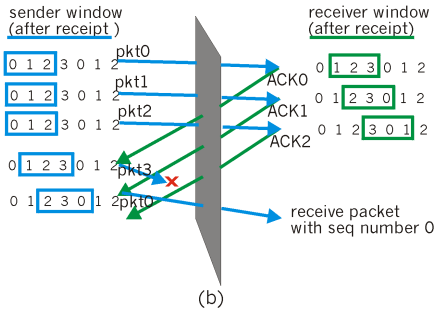
Q: what relationship between seq # size and window size?