


- Non-traditional devices: joystick, robot actuators, flying surfaces of an airplane, fuel injection system of a car, ...
- Traditional devices: disk drive, printer, keyboard, modem, mouse, display
- The device itself
 - Actions, and reads/writes data onto the system bus.
 - Controller: receives commands from the system bus, translates them into device actions
 - * Data-out: data being sent from the CPU to the device
 - * Data-in: data being sent from the device to the CPU
 - * Control: command to perform
 - * Status indicates a device busy, data ready, or error condition
- A device port typically consisting of 4 registers
- Multiple devices.
- System bus: allows the device to communicate with the CPU, typically shared by multiple devices.

Architecture of I/O Systems

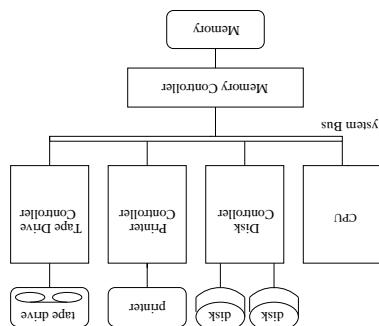

- How can the OS improve the performance of I/O?
- How does the OS implement those services?
- What I/O services does the OS provide?
- How does I/O hardware influence the OS?

Todays: I/O Systems

- What happens if the device is slow compared to the CPU?
- Good choice if data must be handled promptly, like for a modem or keyboard
- CPU observes the change to idle and reads the data if it was an input operation.
- If the operation succeeds, the controller changes the status to idle.
- Controller reads the command register and performs the command, placing a value in data-in if it is an input command.
- CPU sets status to command-ready \Rightarrow controller sets status to busy
- CPU sets the command register and data-out if it is an output operation.
- CPU busy-waits until the status is idle.

Communication using Polling

- Device drivers to implement device-specific behaviors.
(example).
- Error handling and failure recovery associated with devices (command retries, for I/O scheduling).
- Buffering, caching, and spooling to allow efficient communication with devices.
- Device allocation.
- Operations appropriate to the files and devices.
- Access control.
- Naming of files and devices. (On Unix, devices appear as files in the /dev directory)

I/O Services Provided by OS

- The DMA controller instead of the CPU controls the bus and interrupts the CPU when the transfer is complete, instead of when each byte is ready.
- The DMA controller operates the bus and destination of the source and destination of the transfer.
- The CPU tells the DMA the locations of the source and destination of the transfer, data-in/data-out registers, it has an address register.
- Use a sophisticated DMA controller that can write directly to memory. Instead of transferring itself.

- **Solution:** Direct memory access (DMA)

- For devices that transfer large volumes of data at a time (like a disk block), it is expensive to have the CPU retrieve these one byte at a time.

Direct Memory Access

- On an I/O interrupt:
 - Determine which device caused the interrupt.
 - If the last command was an input operation, retrieve the data from the device register.
 - Start the next operation for that device.
- Rather than using busy waiting, the device can interrupt the CPU when it completes an I/O operation.

Communication using Interrupts

- The DMA controller interrupts the CPU when the transfer is done.
 - It is transferred over the bus by the DMA controller into a buffer in physical memory.
 - A disk buffer stores a block when it is read from the disk.
- I/O devices typically contain a small on-board memory where they can store data temporarily before transferring to/from the CPU.

I/O Buffering

- **Device characteristics:**
 - Examples: keyboard (sequential, character), disk (block, random or sequential)
 - Operations: input, output, or both
 - Speed
 - Shareable or dedicated
 - ⇒ The OS implements blocking I/O
 - * Most devices are asynchronous, while I/O system calls are synchronous.
 - Timing: synchronous or asynchronous.
 - Access method: sequential or random access
 - Transfer unit: character or block
- The OS provides a high-level interface to devices, greatly simplifying the programmer's job.
 - New devices can be supported by providing a new device driver.
 - Device dependencies are encapsulated in device drivers.
 - Standard interfaces are provided for related devices.

Application Programmer's View of I/O Devices

- Improve disk performance by reducing the number of disk accesses.
 - Idea: keep recently used disk blocks in main memory after the I/O call that brought them into memory completely.
 - Example: Read (diskAddress)
 - If (block in memory) return value from memory
 - Else ReadSector(diskAddress)
 - Example: Write (diskAddress)
 - If (block in memory) update value in memory
 - Else Allocate space in memory, read block from disk, and update value in memory
 - What should happen when we write to a cache?
 - write-through policy (write to all levels of memory containing the block, including to disk). High reliability.
 - write-back policy (write only to the fastest memory containing the block, write to slower memories and disk sometime later). Faster.

Caching

- To cope with speed mismatches between device and CPU.
 - Example: Compute the contents of a display in a buffer (slow) and then zap the buffer to the screen (fast)
 - To cope with devices that have different data transfer sizes.
 - Example: ftp brings the file over the network one packet at a time. Stores to disk happen one block at a time.
 - To minimize the time a user process is blocked on a write.
 - Writes \Rightarrow copy data to a kernel buffer and return control to the user program. The write from the kernel buffer to the disk is done later.

Why buffer on the OS side?

- utilization.
- Increase physical memory to reduce amount of time paging and thereby improve CPU utilization.
- Increase the number of devices to reduce contention for a single device and thereby improve CPU utilization.
- Offload computation from the main CPU by using DMA controllers.
- Reduce interrupt frequency by using large data transfers
- Reduce data copying by caching in memory
- Approaches to improving performance:
 - I/O is typically supported via system calls and interrupt handling, which are slow.
 - Contention from multiple processes.
 - Slow devices and slow communication links
- I/O is expensive for several reasons:

Summary

4. When the process gets the CPU, it begins execution following the system call.
3. OS transfers the data to the user process and places the process in the ready queue.
2. OS checks if data is in a buffer. If not,
 1. User process requests a read from a device.
- (a) OS tells the device driver to perform input.
- (b) Device driver tells the DMA controller what to do and blocks itself.
- (c) DMA controller transfers the data to the kernel buffer when it has all been retrieved from the device.
- (d) DMA controller interrupts the CPU when the transfer is complete.

Putting the Pieces Together - a Typical Read Call