


Distributed System Architectures

- Architectures for distributed systems
 - Part 1: Architectural styles
 - Part 2: Client-server architectures
 - Part 3: Decentralized, peer-to-peer, and other architectures

Part 1: Architectural Styles


- Important styles of architecture for distributed systems
 - Layered architectures
 - Object-based architectures
 - Data-centered architectures
 - Event-based architectures
 - Resource-based architectures

Layered Design

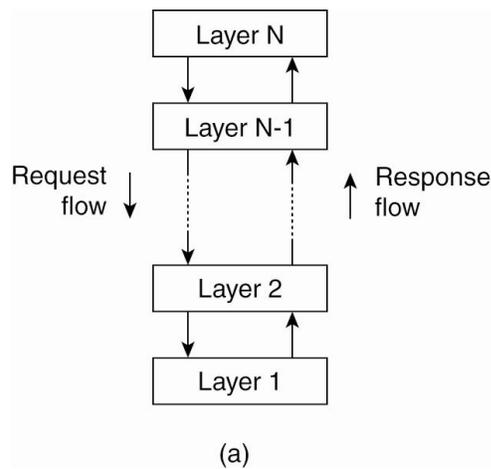


- Each layer uses previous layer to implement new functionality that is exported to the layer above
- Example: Multi-tier web apps

Object-based Architecture

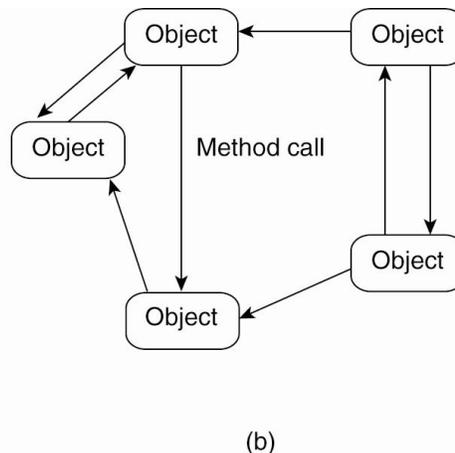


- Each object corresponds to a components
- Components interact via remote procedure calls
 - Popular in client-server systems

Event-based architecture

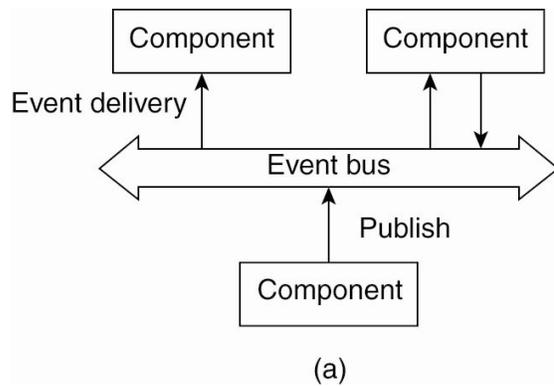

- Communicate via a common repository
 - Use a publish-subscribe paradigm
 - Consumers subscribe to types of events
 - Events are delivered once published by any publisher

Shared data-space

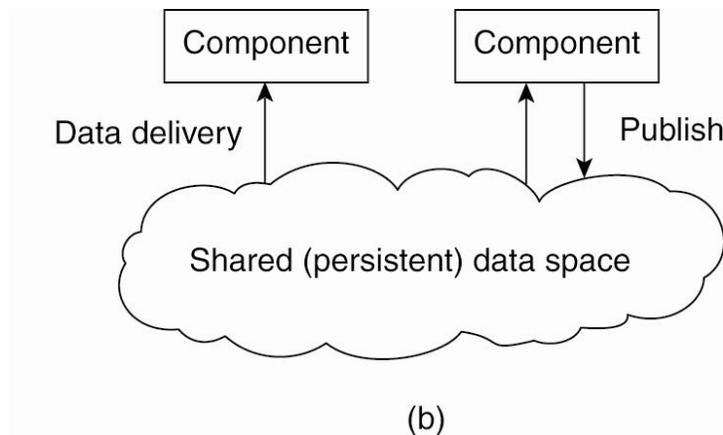

- “Bulletin-board” architecture
 - Decoupled in space and time
 - Post items to shared space; consumers pick up at a later time

Resource-oriented Architecture

- Example of ROA: Representational State Transfer (REST)
 - Basis for RESTful web services
 - Resources identified through a single naming scheme
 - All services offer same interface (e.g., 4 HTTP operations)
 - Messages are fully described
 - No state of the caller is kept (stateless execution)
 - Example: use HTTP for API
 - <http://bucketname.s3.amazonaws.com/objName>
 - Get / Put / Delete / Post HTTP operations
 - Return JSON objects


```
{"name":"test.com","messages":["msg 1","msg 2","msg 3"],"age":100}
```
 - **Discuss:** Service-oriented (SOA) vs. Resource-oriented (ROA)


OOA vs. ROA vs. SOA

Attribute	Object-oriented	Resource-oriented	Service-oriented
Granularity	Object instances	Resource instances	Service instances
Main Focus	Marshalling parameter values	Request addressing (usually URLs)	Creation of request payloads
Addressing / Request routing	Routed to unique object instance	Unique address per resource	One endpoint address per service
Are replies cacheable?	No	Yes	No
Application interface	Specific to this object / class – description is middleware specific (e.g. IDL)	Generic to the request mechanism (e.g. HTTP verbs)	Specific to this service – description is protocol specific (e.g. WSDL)
Payload / data format description	Yes – usually middleware specific (e.g. IDL)	No – nothing directly linked to address / URL	Yes – part of service description (e.g. XML Schema in WSDL)

Courtesy: <https://www.microsoft.com/en-us/research/wp-content/uploads/2016/02/3-arch-styles.pdf>

End of Part 1

- Reminder: No laptop or phone use during class. Masks mandatory.

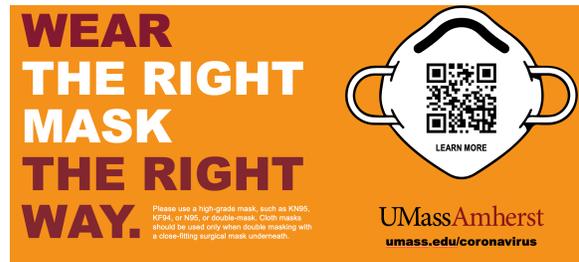


- Career Fair on Feb 24th

UMassAmherst

Lecture 2, page 9

Part 2: Client-Server Architectures

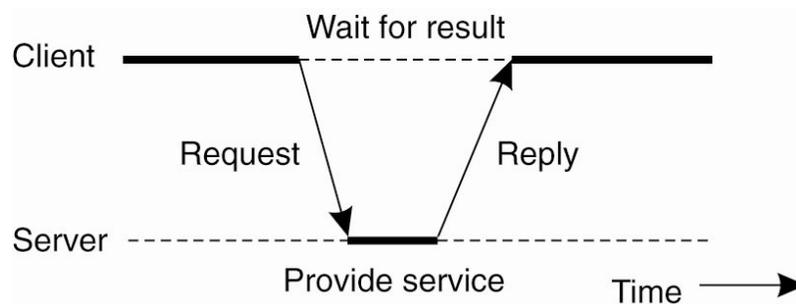


- Most common style: client-server architecture
- Application layering
 - User-interface level
 - Processing level
 - Data level

UMassAmherst

Lecture 2, page 10

Search Engine Example

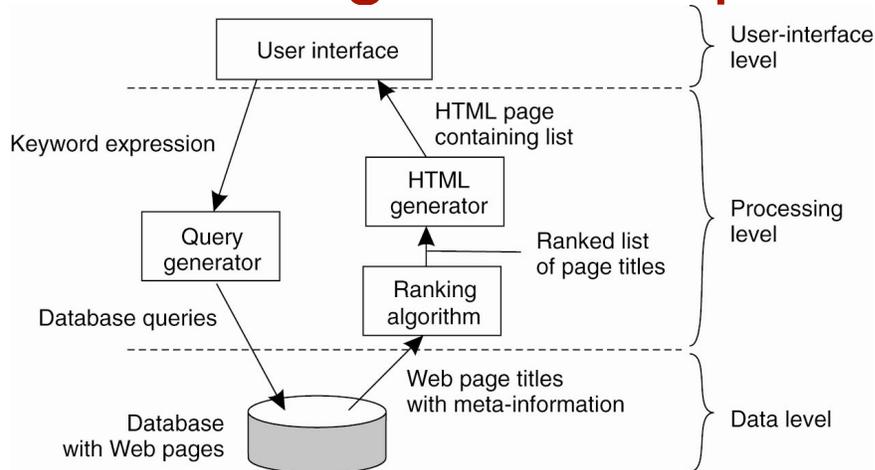


- Search engine architecture with 3 layers

Multitiered Architectures


- The simplest organization is to have only two types of machines:
- A client machine containing only the programs implementing (part of) the user-interface level
- A server machine containing the rest,
 - the programs implementing the processing and data level

A Spectrum of Choices

- From browser-based to phone-based to desktop apps

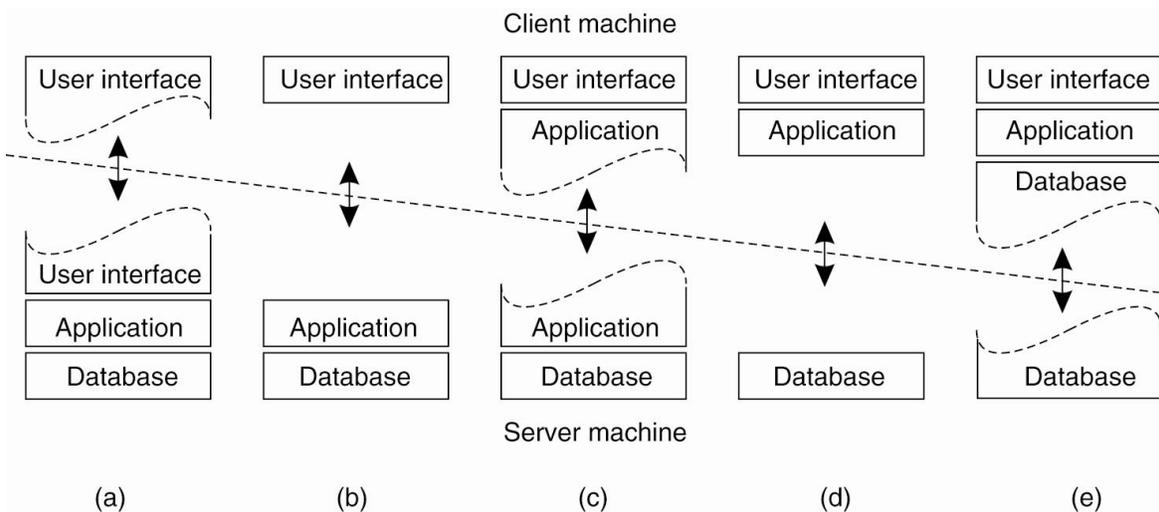


Three-tier Web Applications

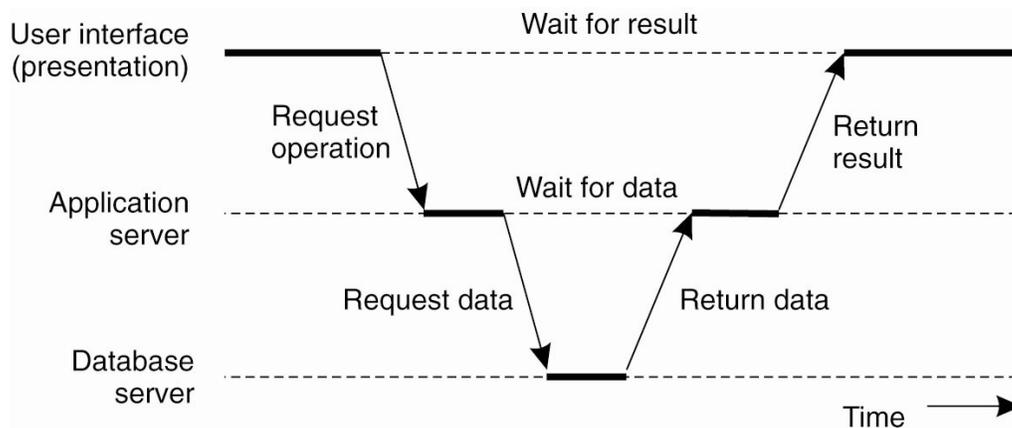


- Server itself uses a “client-server” architecture
- 3 tiers: HTTP, J2EE and database
 - Very common in most web-based applications

Edge-Server Systems

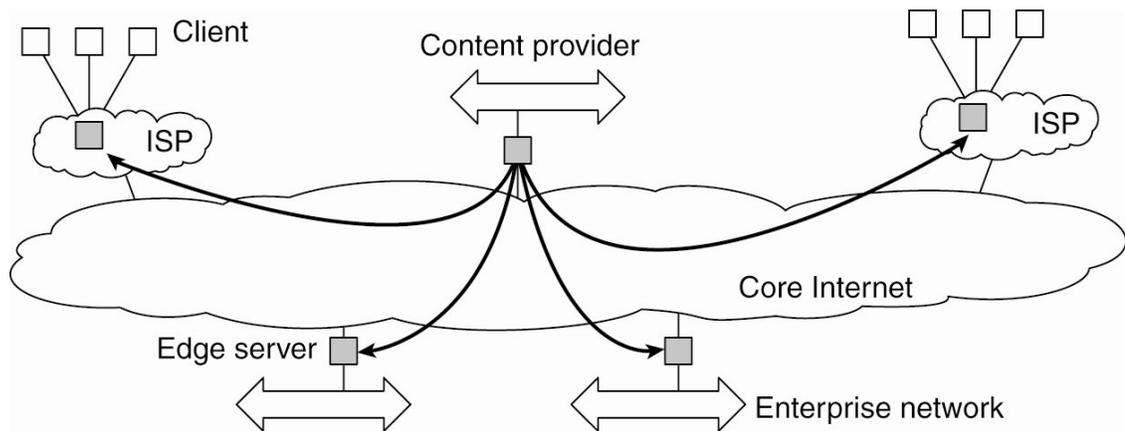


- Edge servers: from *client-server* to *client-proxy-server*
- Content distribution networks: proxies cache web content near the edge
- Evolved into edge computing model

Part 3: Decentralized Architectures

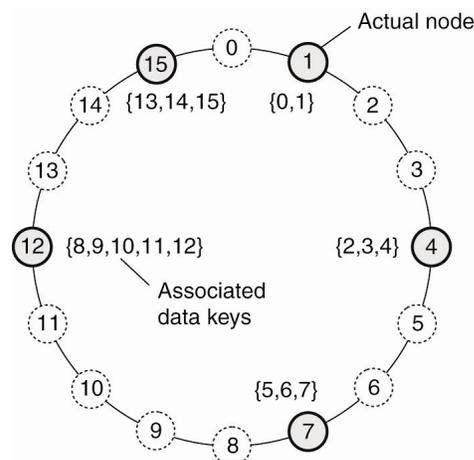

- Peer-to-peer systems
 - Removes distinction between a client and a server
 - Overlay network of nodes
- Chord: structured peer-to-peer system
 - Use a distributed hash table to locate objects
 - Data item with key k -> smallest node with $id \geq k$

Content Addressable Network (CAN)

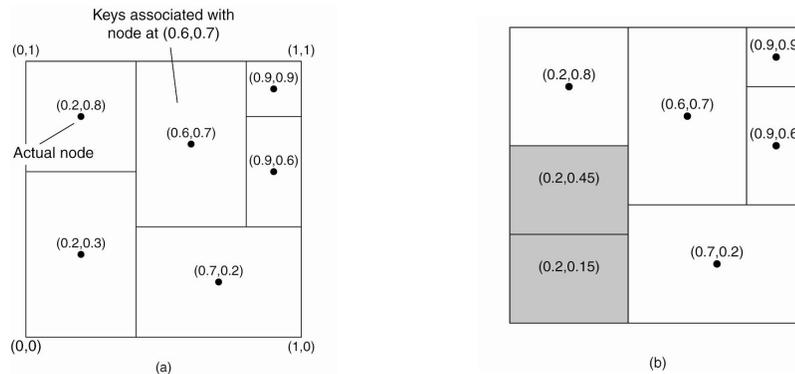


- CAN: d-dimensional coordinate system
 - Partitioned among all nodes in the system
 - Example: $[0,1] \times [0,1]$ space across 6 nodes
 - Every data item maps to a point
 - Join: pick a random point, split with node for that point
 - Leave: harder, since a merge may not give symmetric partitions

Unstructured P2P Systems


- Topology based on randomized algorithms
 - Each node pick a random set of nodes and becomes their neighbors
 - Gnutella
 - Choice of degree impacts network dynamics

SuperPeers

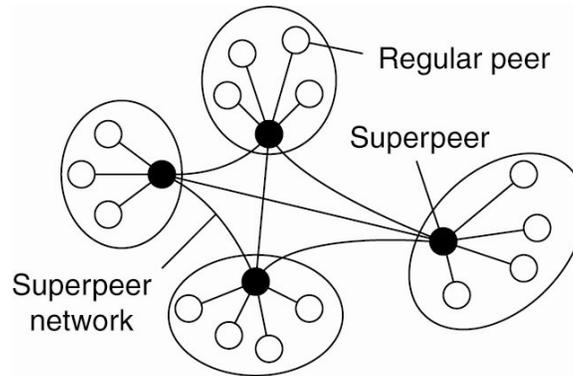

- Some nodes become “distinguished”
 - Take on more responsibilities (need to have or be willing to donate more resources)
 - Example: Skype super-peer in early Skype

Collaborative Distributed Systems

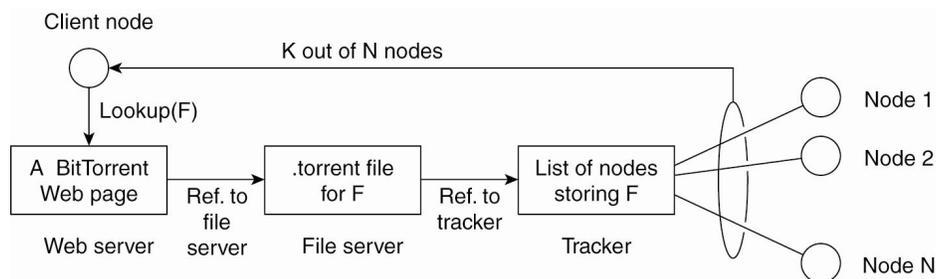

- BitTorrent: Collaborative P2P downloads
 - Download chunks of a file from multiple peers
 - Reassemble file after downloading
 - Use a global directory (web-site) and download a .torrent
 - .torrent contains info about the file
 - Tracker: server that maintains active nodes that have requested chunks
 - Force altruism:
 - » If P sees Q downloads more than uploads, reduce rate of sending to Q

